


1	IN	
2	LD	
3	COM	
4	R1	INPUT PULSE SIGNAL
5	R2	
6	S1	SYNCHRO SIGNAL
7	S2	
8	S3	

11	RS	T1+	OUTPUT RS-422 NMEA0183 VER 2.0
12		T1-	
13	422	T2+	OUTPUT RS-422 NMEA0183 VER 2.0
14		T2-	
15	OUTPUT	SP+	WIND SPEED 4~20MA AT 0-60M/S (OPTION)
16		SP-	
17	OUTPUT	DR+	WIND DIRECTION 4~20MA AT 0~360° (OPTION)
18		DR-	

19	EXT. DIM	T1	EXTERNAL DIMMER 3W 10K
20			
21			

U	POWER	D1	POWER SOURCE
V			
FG			

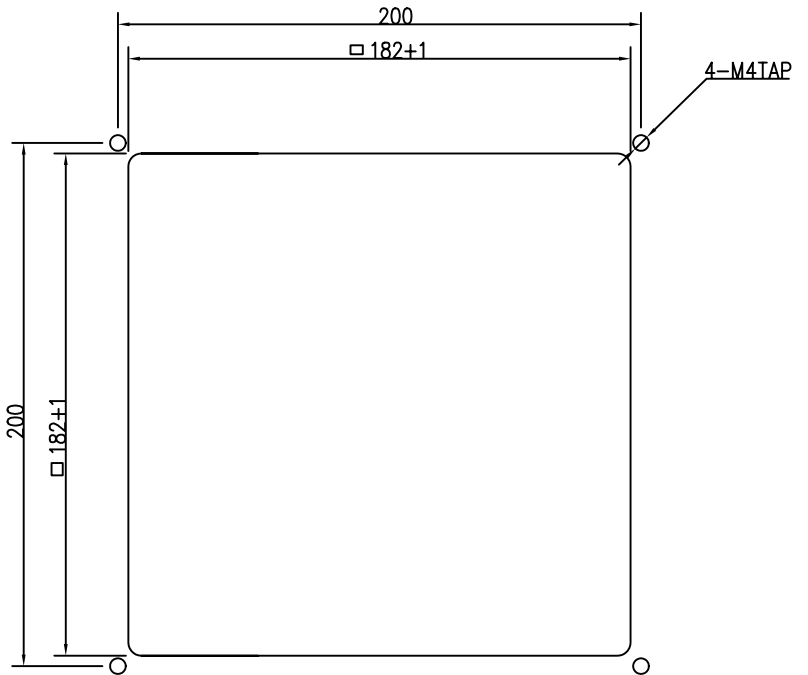

FITTING & CUTTING HOLE DIMENSION

WEIGHT : 1.8kg

SHT. NO.

This drawing is the property of CMR KOREA Co.,Ltd. and must not be wholly or partly copied, reproduced, utilized or published without written consent. This is a CADAM drawing and should not be corrected by hand.

GENERAL TOLERANCE FOR BOX OUTLINE		GENERAL TOLERANCE FOR SENSOR & FITTING HOLE		△									
NOMINAL MEASURE		TOLERANCES		NOMINAL MEASURE		TOLERANCES		REV.	LOC	DATE	NOTE		
OVER	MAX.			OVER	MAX.			APP.	20040101	P. H. LEE	TITLE	REV.	0
1	100	± 1.0		1	4	± 0.3		CHK.			WIND SPEED & DIRECTION INDICATOR (WSSD)	UNIT	mm
100	200	± 2.0		4	16	± 0.5		DWG.	20040101	J. H. LEE		SCALE	N / S
200	500	± 3.0		16	63	± 1.0		SIZE					
500	1000	± 5.0		63	250	± 2.0		A4	CMR KOREA CO., LTD.			DRAWING NO.	ANMIC-03001
1000	2000	± 7.0		250	1000	± 2.5							